

Simple Automation


- Automatic film cut & clamp
- Eliminates wasted operator time getting on and off the fork truck
- Reduces risk of injuries
- Fully protected mechanical cut & clamp



Q-300XT

**Eliminate the "run-around" with Simple Automation™
in a fast - paced environment.**

Q-300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the forkluck.

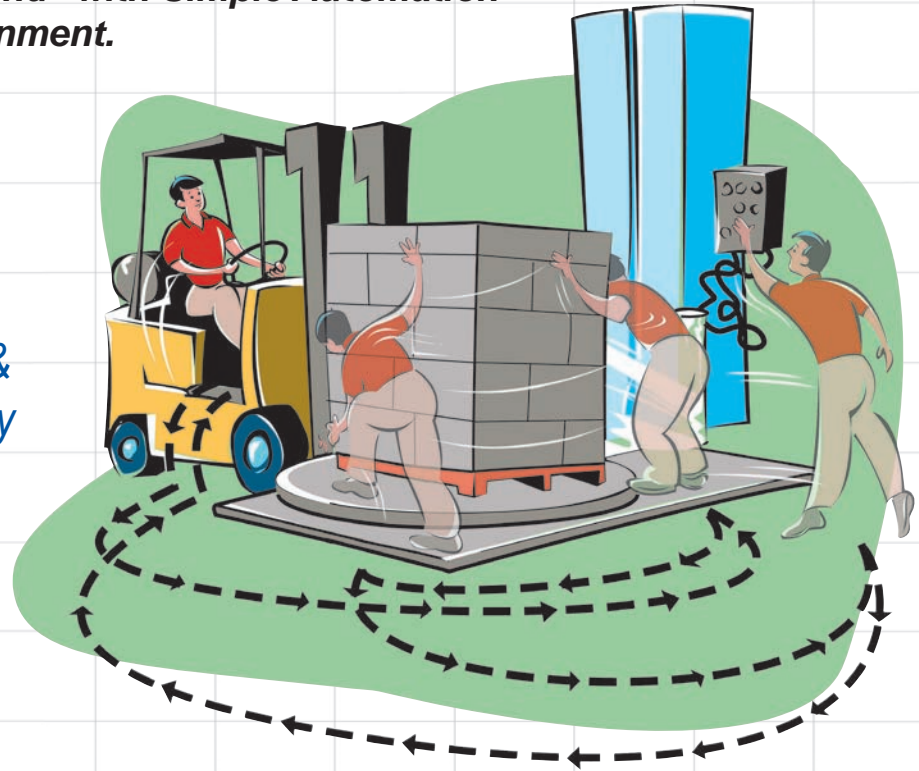

Q-300XT Specifications

PERFORMANCE CRITERIA

■ Production Speed based on 80" load height: 2 film layers and 12 revolutions	30-40 loads per hour
■ Maximum Load Diagonal	69" Recommended*
■ Maximum Load Height	80" **
■ Maximum Load Weight	4000 lbs.

LOAD HANDLING SYSTEM

■ Turntable Drive	3/4 HP TEFC Motor
■ Turntable Speed	1-12 RPM
■ Turntable, Smooth Top	65"

FILM DELIVERY SYSTEM

■ Power-Roller Stretch® Plus System	200% Standard
■ Wrapping Force	Electronically controlled
■ Film Capacity	10" Roll Diameter, 20" Film Web Width

MACHINE SHIPPING WEIGHT


■ Machine size	67"W x 120"L x 93"H
■ Shipping Weight (including skid - approximate)	1650 lbs. (excludes ramp)

ELECTRICAL REQUIREMENTS

■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ Wrap Cycle Pause	Standard

SERVICE SUPPORT PHONE NUMBER

24 hrs/7 days a week
800-866-0322



* Good stretch wrapping practices dictate loads should fit inside entirely within the perimeter of the turntable. If the load must extend beyond the turntable perimeter (overhang), to avoid causing a pinch point, it should not pass within 20" of the stretch wrapper's mast or roll carriage. 69" includes a 20" safety clearance between the load and mast. Machines can handle loads up to 83" but the safety clearance is dramatically reduced to 9" which can create pinch points.

** Maximum wrap height may vary based on film force, neckdown, and roll carriage travel speed.

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2010