

SW-5000

Continuous Motion, Flighted Infeed,
Bottom Lap-Seal Shrink Wrapper


Innovation

Designed to make setup and operation as
simple as possible to increase productivity



Self Threader® Forming Head

- SW-5000 technology uses narrower film width than side seal systems.
- Self threading film loading makes set-up quick and easy.
- Self-correcting film tracking provides optimal uptime.
- Tool-less mounting for fast change-overs.
- Ideal for polyolefin, polypropylene and PVC films.

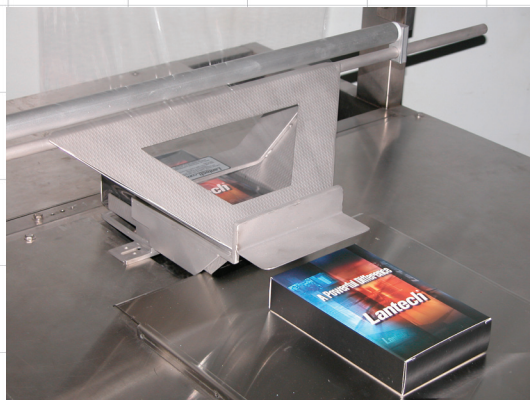

SW-5000



SW-5000 Shrink Wrapper shown with Lantech ST-900 Shrink Tunnel.


Fit to Application

- Operate from either side of the machine.
- 6" Flighted infeed with quick change pins.
- Electronic package spacing.
- Vertical and horizontal product detection.
- Perfect match with ST-Series "soft convection" Shrink Tunnels* (*nylon glass belt required)

Operator-friendly

- Programmable Logic Controller.
- Color touch-screen control panel with password protection.
- Store and recall set-up parameters.
- Multi-chamber, high velocity vacuum belt provides positive film drive and accommodates wide range of product sizes.

Standard operating height range 34.5"-39.5"

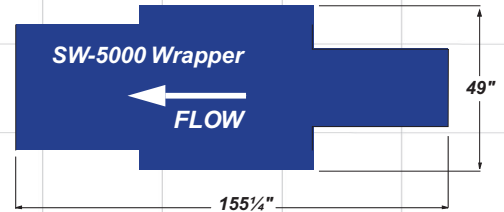

SW-5000 Specifications

PRODUCTION SPEED- FEET/MINUTE - PACKAGES/MINUTE	up to 65 up to 75	COLOR TOUCH SCREEN HMI	Top level access to primary machine functions, changeable without stopping machine Password Protection (3 levels) Easily store and recall up to 16 basic recipes Diagnostic and maintenance features Electronic collapse and product spacing (no mechanical variator) On demand operation - automatic product spacing Swivel mounted HMI accessible from both sides of machine Horizontal/Vertical photo-eye
MACHINE TYPE	Continuous Motion Lap Seal	FLIGHT LUGS	2" H quick change pins SPACING - 6", 9", 12", 18", 36"
INFEED CONVEYOR	Flight lug	WEIGHT (approx. machine/shipping)	2000 / 2900 lbs.
*PRODUCT SIZES (L X W X H) MIN (L X W X H) MAX	3" x 4" x 1/8" 40" X 15" X 8"	OPTIONS	Casters, Gated infeed, Print Registration, Exit transition rollers, Paper Guides, Thermal Lap Seal, Additional Forming Heads
CROSS SEAL TYPE	Hot knife	SERVICE/SUPPORT	24 hours - 7 days/week
CROSS SEAL WIDTH	18"	WARRANTY (except consumable wear items)	1 Year
FILM WIDTH (SINGLE WOUND)	Up to 38" wide		
FILM TYPES	Most Commercial grade Polyolefin, PVC Some films may require change parts.		
VACUUM BELT	Regenerative Blower, Multi-Chambered, 3 phase motor, pressure relief valve		
SELF-THREADER® FORMING HEAD	Quick Change - Standard		
CONTROLS	PLC/Touchscreen		
ELECTRICAL REQUIREMENTS	230 V, 3 phase, 25 Amp		
PNEUMATIC REQUIREMENTS	8-12 CFM @ 85 PSI		

*Maximum height and maximum width cannot run concurrently.

Also available: SW-1000 Intermittent Motion Belted Infeed and SW-2000 Continuous Motion Belted Infeed Wrappers

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2010